



1300 654 244

Quality That Makes an Entrance

SAFE GUARD


FINGER PROTECTION


APV Aluminium Panoramic Full View™



- Marine grade aluminium frame
- Interchangeable panels
- Custom designs
- Modern and stylish
- Over 100 Powder coated colour Choices



Garage Doors / Gates / Roller Doors / Residential Doors / Commercial Doors / Custom Sectional Doors

10
YEAR
WARRANTY

ENERGY
EFFICIENT

DOORS

654 244

- Garage Doors
- Remote Controls
- Spare Parts

- Gates
- Operators
- Installation

AMMO DOORS
GARAGE DOORS, GATES, REMOTE CONTROLS

Quality That Makes an Entrance

ENERGY EFFICIENT

At Ammo Doors, we know this is the world's safest and strongest aluminium panel sectional garage door.

WIND RESISTANCE

With our unique tooling and our CAD drawing design, we have made our APV (Aluminium Panoramic Full View) garage door now possible to span up to 8 meters wide and 6 meters high - Figure 1

SECURITY


We have made it possible to provide you the latest trends and innovative designs. Customise your door in any way you want.

STYLISH

Acrylic, Aluminium, Timber, Steel, Diamond Mesh, Alucobond, Bullet Proof Glass, Fibre Glass, the choice is yours (These inserts can be easily changed to create a new custom look).




COLOURS Actual powder coated colors may vary from samples shown



DARK
WOODGRAIN




MEDIUM
WOODGRAIN

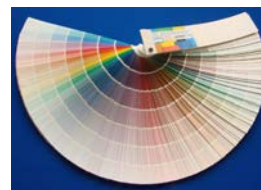

Over 100 POWDER
COATED COLOURS

Quality That Makes an Entrance

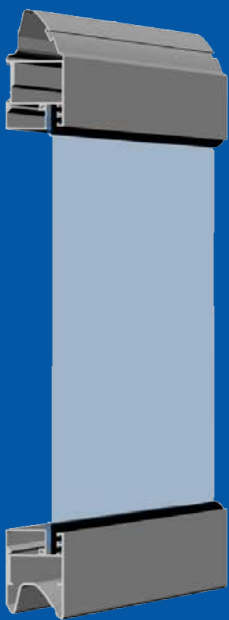


To suit opening width 4500mm



To suit opening width 5500mm
Using 85mm profile



To suit opening width 8000mm
Using 100mm profile

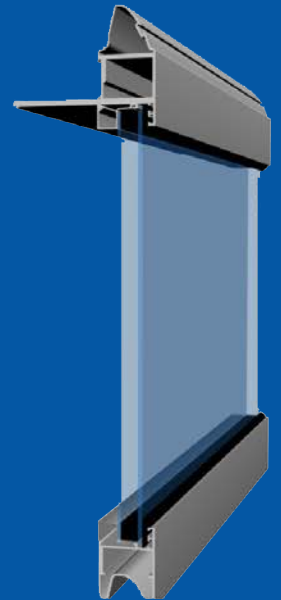

To suit opening width 8000mm
Using 100mm profile

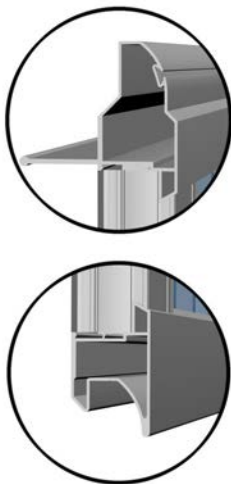


Figure 1

APV has ability to be made with thermal qualities. Single layer, double layer and hollow double to keep the heat inside or outside. This can be used in -45°C and in excess of 65°C.

Internal EMDM material is sealed between the section in extreme temperature to prevent any loss or penetration through the panels. The bottom is sealed with either EPDM Bulb-Type Bottom for commercial applications and the weather seal for general application.

The transparent polycarbonate glass has a thickness of 3-5mm. We use this high-level American GE imported polycarbonate glass with scratch resistance as this is more durable than standard Acrylic and will not bow or buckle under heat.

Our guarantee to excellence is backed up with a 10 year warranty*.



*Terms and conditions: Please see www.ammodoors.com.au


Quality That Makes an Entrance



Ammo Doors is a Proud distributor of



PHOENIX DOORS
ENVIRO 4
PH: 1300 103 556

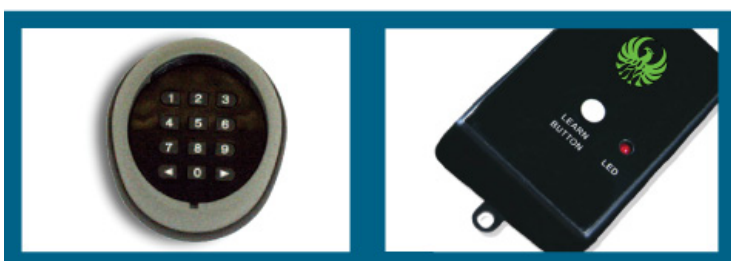

1200NM Commercial Operator
Motor: 24V DC 80W/100W
Power Supply: 240 volts
Max Door Size: 24M2
Limits Positioning: ELECTRONIC
Receiver Frequency: 433.92MHz
Courtesy Light: 3 Min 5W
3 Remote Controls Up to 50 meters Range

Optional Extras:

- Battery Backup
- Wireless Digital Keypad
- Stand Alone Receiver
- Safety Eyes/Beams
- Key Switch/Release

Distributed by:



Head Office Address

5-15 Lapis Street, Underwood
Brisbane, Queensland, Australia 4119

Telephone: 07-3290 4444
Fax: 07-3290 1614

Email: sales@ammodoors.com.au
Website: www.ammodoors.com.au